

**Smaller, lighter and  
even more powerful**




www.prebena.com

# Pneumatic Stapler 4C-Z50

for staples type Z from 16 - 50 mm (5/8" - 2")



**General building approval Z-9.1-495**

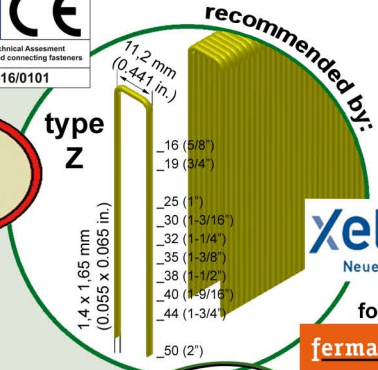


**recommended by:**  
**Xella**  
Neues Bauen  
for:  
**fermacell**

**EUROCODE 5**  
nach EN 14592



**Technical details:**  
Weight: 2,2 kg (4.85 lb.)  
Operating pressure: approx. 5 - 8 bar (71 - 114 psi.)  
Air requirement: approx. 1,72 l / staple (0.378 gal./ staple)

**Smooth impact:**  
Fermacell, plasterboard, boxes, corrugated cardboards, cedar and shake shingles, chipboards, packaging, substructures, saving formwork, cardboard pallets, prefab construction and much more.

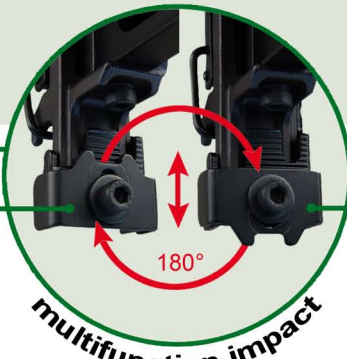

**Splined impact:**  
groove and tongue profile, watherboarding, wire fences, windbreak fences and much more.



Impact with wide contact surface for plaster board and fermacell as accessories (ET44221701) available.

- 180° rotatable for work with smooth ore splined impact
- adjustable depth control
- available with and without impact

- Standard equipment:**
- increased driver
  - adjustable exhaust
  - ergonomic handle
  - safety device